



## Solenoid valve 2/2 way N.O. With piston pilot control

4055PW

### PRESENTATION:

S.V. with pilot control for interception of fluid compatible with the construction materials.  
 A minimum operational pressure of 0,5 bar is required.  
 The materials used and the tests carried out ensure maximum reliability and duration.  
 These solenoid valves are not suitable for stagnating fluids, or for fluids that being subject to evaporation may deposit solid, calcareous or similar residues.

**USE:** Automation - Compressors  
 Heating

**PIPES:** G 1/4


**COIL:** 5W - Ø 10  
 LBA 155°C (class F)  
 LBV 180°C (class H)

**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Environment temperature:  
 with coil class **F** - 10°C + 60°C  
 with coil class **H** - 10°C + 80°C



Gaskets	Temperature		Medium
F=H-NBR (hydrogenated nitrile)	- 10°C	+140°C	Air, inert gas, water

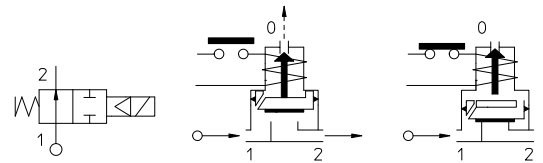

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power (watt)	Pressure		
		cSt	°E				min bar	M.O.P.D. AC bar DC bar	
G 1/4	4055PW	53	~ 7	5,5*	9	5	0,5	15	-

### Note

\* 3rd way exhaust = Ø 1,2 mm  
 Available on request and with minimum quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

### MATERIALS:

<b>Body</b>	Brass - UNI EN 12165 CW617N
<b>Armature tube</b>	Stainless steel AISI series 300
<b>Fixed core</b>	Stainless steel AISI series 400
<b>Plunger</b>	Stainless steel AISI series 400
<b>Phase displacement ring</b>	Copper - Cu 99,9%
<b>Spring</b>	Stainless steel AISI series 300
<b>Seal</b>	F=H-NBR
<b>Orifice</b>	Brass - UNI EN 12165 CW617N

### On request:


<b>Connector</b>	Pg 9 o Pg 11
<b>Connector conformity</b>	ISO 4400

### FEATURES:


<b>Electrical conformity</b>	IEC 335
<b>Protection degree</b>	IP 65 EN 60529 (DIN 40050) with coil fitted by connector.

### SPARE PARTS:

- |   |  |
|---|--|
| <b>1. Coil:</b><br>See coils list                 | <b>6. Complete piston:</b><br>Code R452297/F |
| <b>2. Complete plunger:</b><br>Code R452061/V     |  |
| <b>3. Complete armature tube:</b><br>Code R452143 |  |
| <b>4. Gasket O-Ring:</b><br>Code R990597/V        |  |
| <b>5. Gasket O-Ring:</b><br>Code R990000/V        |  |

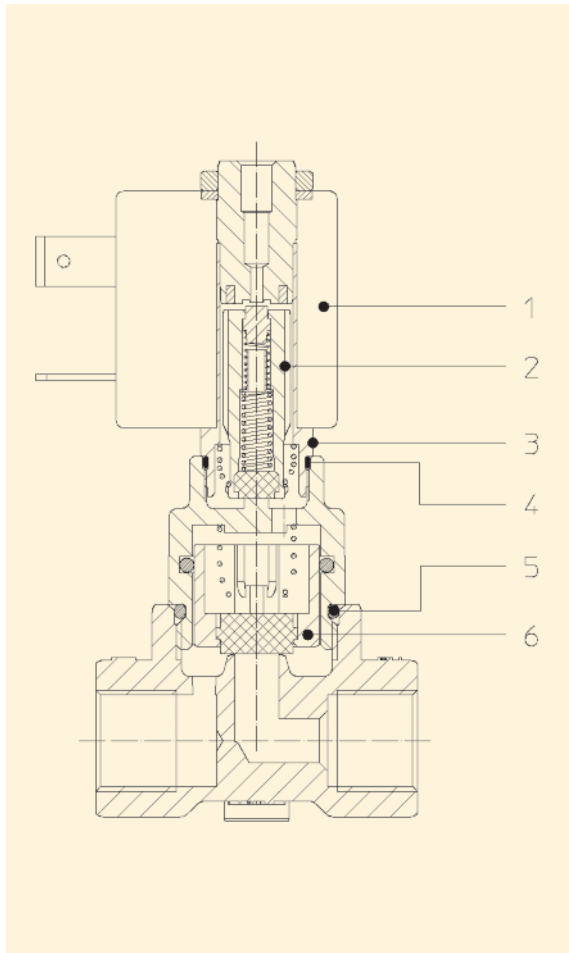

### DIMENSIONS:

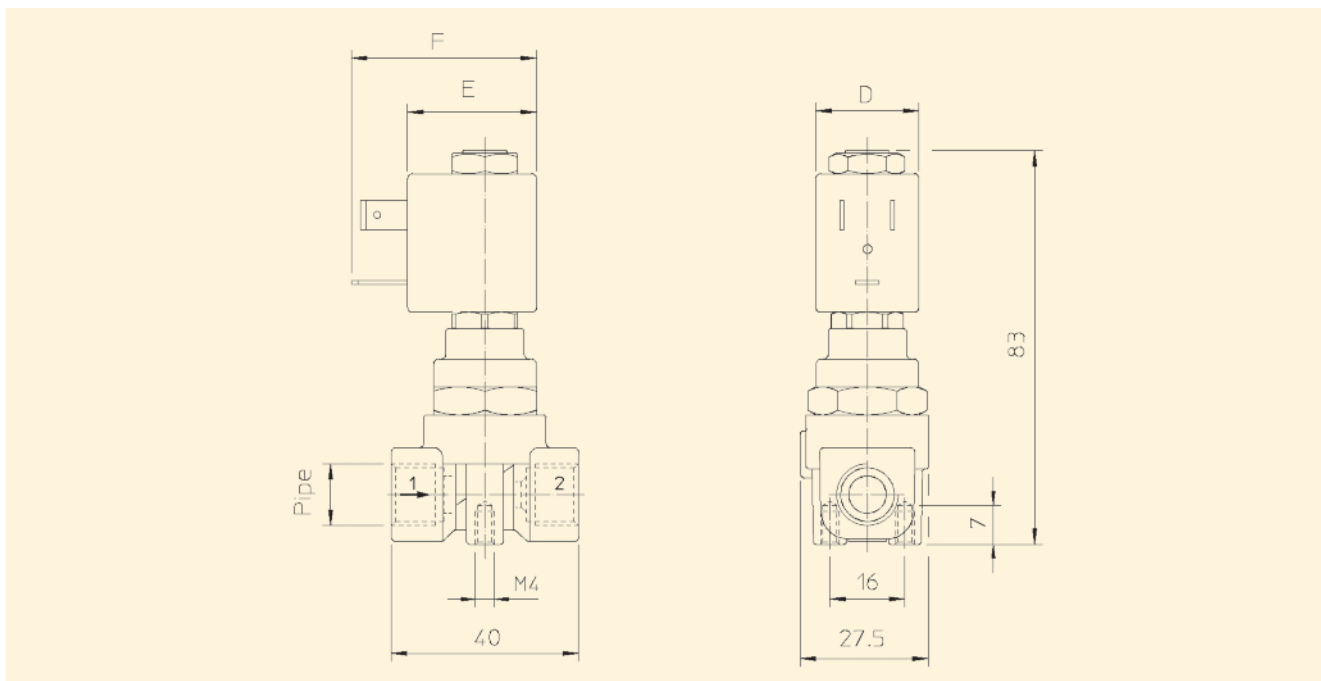

COIL TYPE	POWER ABSORPTION			DIMENSIONS		
	W ==	Hold VA ~	Inrush VA ~	D mm	E mm	F mm
L	5	10	15	22	27,5	39,5